



Evoke Touch



Evoke Grey Touch

4 colours / 1 Finish / 3 Sizes

Evoke Touch

Evoke is the ultimate expression of design and architecture, the manifestation of a cement with history that has gradually changed and adapted over time.

Deeply inspired by the metropolis and urban reflections typical of the world's major cities, this collection bears resemblance to the typically urban lofts that seek to incorporate cement into the spaces and desires of avant-garde architecture.



Evoke White Touch

NCS188620 600x600x9.5mm
NCS188621 900x900x11mm
NCS188622 600x1200x11mm




Evoke Beige Touch

NCS188623 600x600x9.5mm
NCS188624 900x900x11mm
NCS188625 600x1200x11mm



Evoke Light Grey Touch

NCS188626 600x600x9.5mm
NCS188627 900x900x11mm
NCS188628 600x1200x11mm

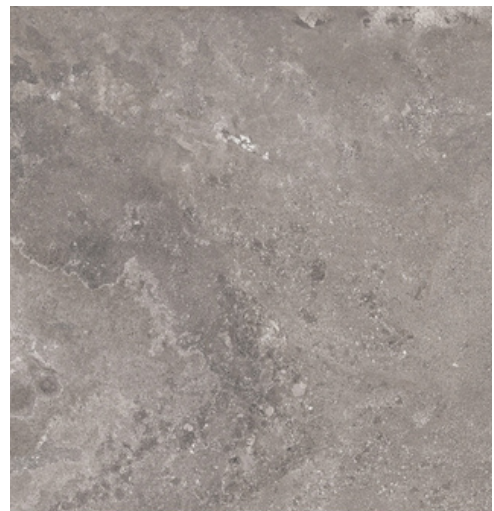

Evoke Grey Touch

NCS188629 600x600x9.5mm
NCS188630 900x900x11mm
NCS188631 600x1200x11mm



Evoke Touch

Technical Specifications Physical properties

	Test Method	Value Result	N&C Value
Slip Resistance (Pendulum Test Values Rating)	BS 7976	-	
Water Absorption	EN ISO 10545-3	> 0.03% < 0.05%	
Breaking Strength	EN ISO 10545-4	≥ 2300 N	
Modulus of Rupture	EN ISO 10545-4	≥ 45 N/mm ²	
Resistance to Abrasion	EN ISO 10545-4	≤ 145 mm ³	
Length	EN ISO 10545-2	According to the norm	
Width	EN ISO 10545-2	According to the norm	
Thickness	EN ISO 10545-2	According to the norm	
Straightness of Sides	EN ISO 10545-2	According to the norm	
Squareness	-	-	
Surface Flatness	EN ISO 10545-2	According to the norm	
Colour Resistance to Light Exposure	-	-	

Chemical Properties

	Test Method	Value Result	N&C Value
Resistance to Acids (weak)	EN ISO 10545-13	LA	
Resistance to Acids (strong)	EN ISO 10545-13	LA	
Resistance to House Hold Cleaning Products	EN ISO 10545-13	A	
Resistance to Staining	EN ISO 10545-14	4-5	

020 8586 4600 | www.ncspecifier.com | info@nichollsandclarke.com