

# N&C

## Tropic



Tropic Grey & Tropic Green

4 Colours/ 1 Finish / 2 Sizes

## Tropic

Captivating, the surface of the collection has slight oxidised contrasts, that along with the on-trend décor add volume, liveliness and charisma to interior spaces.



Tropic Green & Tropic White & Tropic Exotic Decor



# Tropic

Captivating, the surface of the collection has slight oxidised contrasts, that along with the on-trend décor add volume, liveliness and charisma to interior spaces.



Tropic White

NB16510 350x1000x10mm  
NB16513 800x800x10mm




Tropic Green

NB16511  
350x1000x10mm



Tropic Exotic Decor

NB16512  
350x1000x10mm

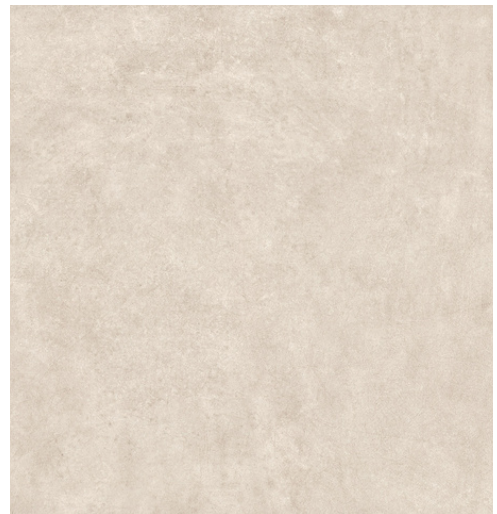

Tropic Grey

NB16514  
800x800x10mm



## Tropic Ceramics

### Technical Specifications Physical properties

|  | Test Method    | Value Result          | N&C Value |
|--|----------------|-----------------------|-----------|
| Slip Resistance<br>(Pendulum Test Values Rating) | BS 7976        | -                     |           |
| Water Absorption                                 | EN ISO 10545-3 | 16%                   |           |
| Breaking Strength                                | EN ISO 10545-4 | 700 N                 |           |
| Modulus of Rupture                               | EN ISO 10545-4 | 19 N/mm <sup>2</sup>  |           |
| Resistance to Abrasion                           | EN ISO 10545-4 | -                     |           |
| Length   | EN ISO 10545-2 | According to the norm |           |
| Width  | EN ISO 10545-2 | According to the norm |           |
| Thickness  | EN ISO 10545-2 | According to the norm |           |
| Straightness of Sides                            | EN ISO 10545-2 | According to the norm |           |
| Squareness                                       | -              | According to the norm |           |
| Surface Flatness                                 | EN ISO 10545-2 | According to the norm |           |
| Colour Resistance to Light Exposure              | -              | -                     |           |

### Chemical Properties

|  | Test Method     | Value Result | N&C Value |
|--|-----------------|--------------|-----------|
| Resistance to Acids (weak)                 | EN ISO 10545-13 | GLB          |           |
| Resistance to Acids (strong)               | EN ISO 10545-13 | GLB          |           |
| Resistance to House Hold Cleaning Products | EN ISO 10545-13 | GA           |           |
| Resistance to Staining                     | EN ISO 10545-14 | 4            |           |



## Tropic Porcelain

### Technical Specifications Physical properties

|  | Test Method    | Value Result          | N&C Value |
|--|----------------|-----------------------|-----------|
| Slip Resistance<br>(Pendulum Test Values Rating) | BS 7976        | -                     |           |
| Water Absorption                                 | EN ISO 10545-3 | 0.1%                  |           |
| Breaking Strength                                | EN ISO 10545-4 | 2500 N                |           |
| Modulus of Rupture                               | EN ISO 10545-4 | 50 N/mm <sup>2</sup>  |           |
| Resistance to Abrasion                           | EN ISO 10545-4 | ≤ 139 mm <sup>3</sup> |           |
| Length   | EN ISO 10545-2 | According to the norm |           |
| Width  | EN ISO 10545-2 | According to the norm |           |
| Thickness  | EN ISO 10545-2 | According to the norm |           |
| Straightness of Sides                            | EN ISO 10545-2 | According to the norm |           |
| Squareness                                       | -              | -                     |           |
| Surface Flatness                                 | EN ISO 10545-2 | According to the norm |           |
| Colour Resistance to Light Exposure              | -              | -                     |           |

### Chemical Properties

|   | Test Method     | Value Result | N&C Value |
|---|-----------------|--------------|-----------|
| Resistance to Acids (weak)                    | EN ISO 10545-13 | ULB          |           |
| Resistance to Acids (strong)                  | EN ISO 10545-13 | ULB          |           |
| Resistance to House Hold Cleaning<br>Products | EN ISO 10545-13 | UA           |           |
| Resistance to Staining                        | EN ISO 10545-14 | 4            |           |