

N&C

Living



Living Fog

4 Colours / 1 Finish / 2 Sizes

Living


This porcelain floor shows its aesthetic refinement with styles, shapes, colour and geometric patterns from the past emerging in a modern motive.



Living Smoke

Living

This porcelain floor shows its aesthetic refinement with styles, shapes, colour and geometric patterns from the past emerging in a modern motive.

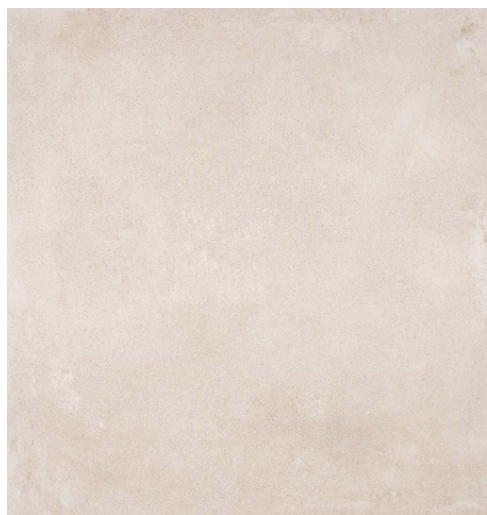

Living Cream

NCS189732 600x600x8.8mm
NCS189733 300x600x8.7mm



Living Tortora

NCS189734 600x600x8.8mm
NCS189735 300x600x8.7mm



Living Fog

NCS189736 600x600x8.8mm
NCS189737 300x600x8.7mm



Living Smoke

NCS189738 600x600x8.8mm
NCS189739 300x600x8.7mm



Living

Technical Specifications Physical properties

	Test of Norm	Value of Norm	N&C Value
Slip Resistance (Pendulum Test Values Rating)	BS 7976-2	PTV [0 – 100]	PTV = 16
Water Absorption	EN ISO 10545-3	$E \leq 0,5\%$	COMPLIANT
Breaking Strength	EN ISO 10545-4	≥ 1300 N	COMPLIANT
Modulus of Rupture	EN ISO 10545-4	≥ 35 N/mm ²	COMPLIANT
Resistance to Abrasion	EN ISO 10545-7	*According to tile colour	*According to tile colour
Length	EN ISO 10545-2	$\pm 0,6\%$	COMPLIANT
Width	EN ISO 10545-2	$\pm 0,6\%$	COMPLIANT
Thickness	EN ISO 10545-2	$\pm 5\%$	COMPLIANT
Straightness of Sides	EN ISO 10545-2	$\pm 0,5\%$	COMPLIANT
Squareness	EN ISO 10545-2	$\pm 0,5\%$	COMPLIANT
Surface Flatness	EN ISO 10545-2	$\pm 0,6\%$	COMPLIANT
Colour Resistance to Light Exposure	EN ISO 10545-16	*According to tile colour	*According to tile colour

Chemical Properties

	Test of Norm	Value of Norm	N&C Value
Resistance to Acids (weak)	EN ISO 10545-13	GLA–GLB–GLC	GLA
Resistance to Acids (strong)	EN ISO 10545-13	GHA–GHB–GHC	GHA
Resistance to House Hold Cleaning Products	EN ISO 10545-13	GA–GB–GC	GA
Resistance to Staining	EN ISO 10545-14	1-2-3-4-5	5