




## Hybrid Natural

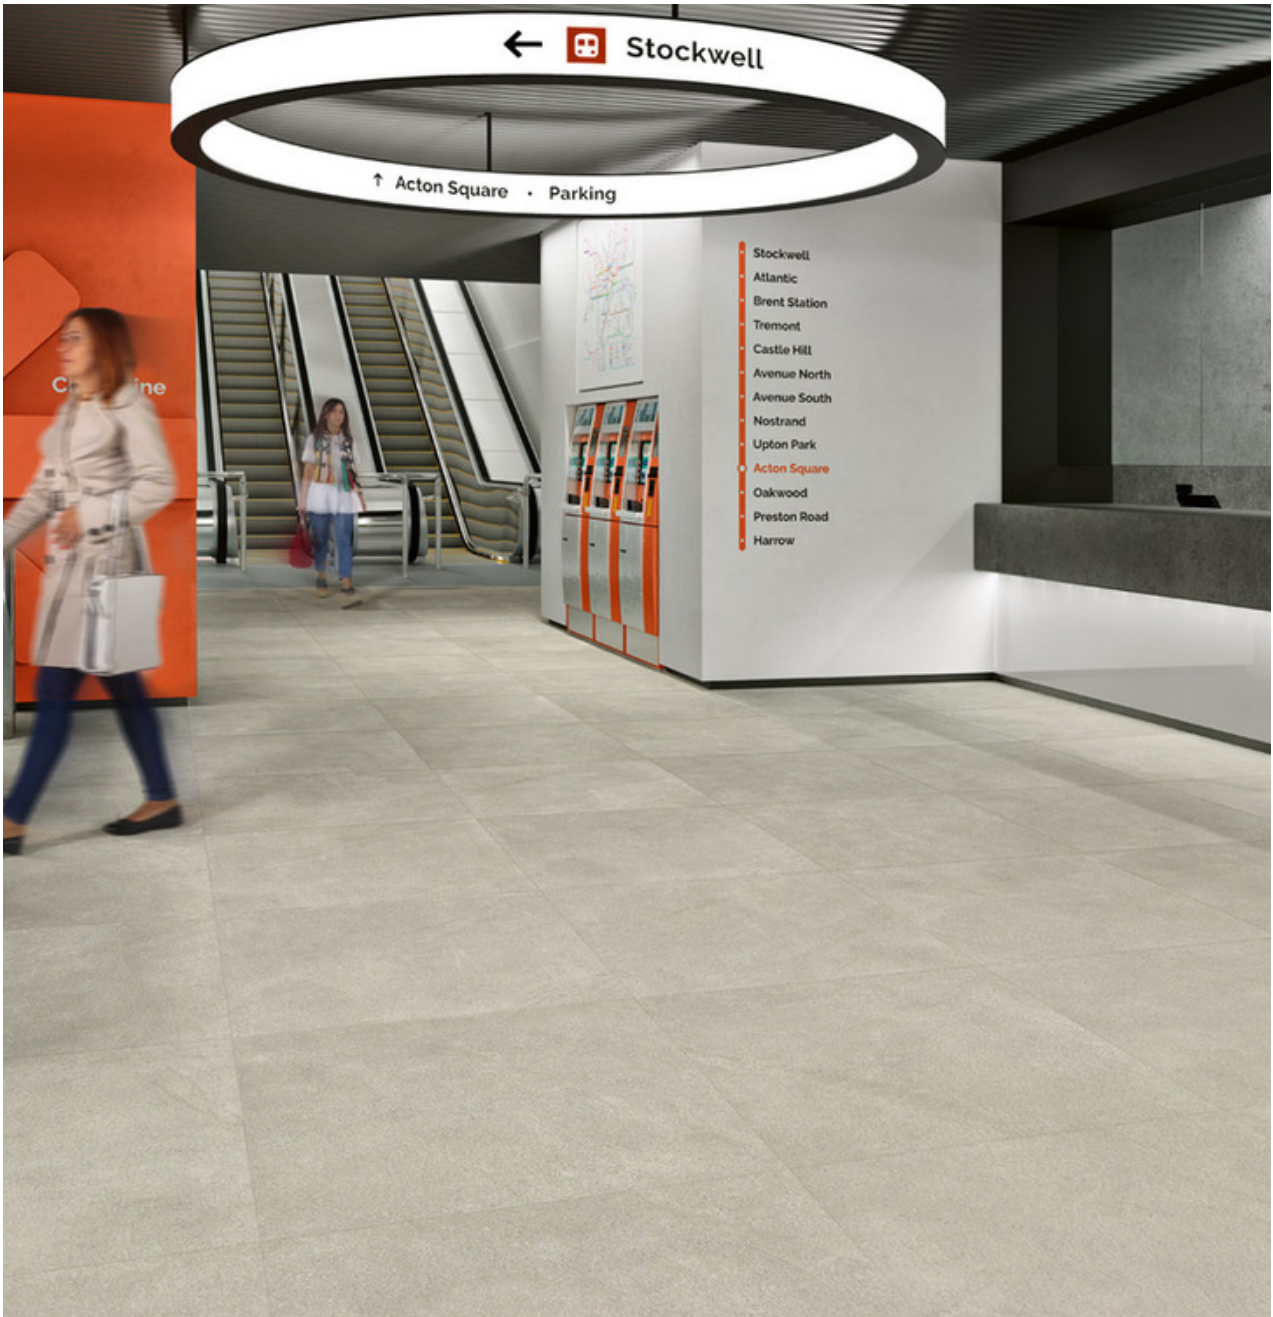

Hybrid Light Grey Natural

5 colour / 1 Finish / 4 Sizes

## Hybrid

Hybrid is a remarkable example of porcelain stoneware that uses Dual Tech technology, capable of adding an unmatched graphic richness and a controlled application of colours. The technical component of this collection makes it the perfect choice for large spaces, which not only require large dimensions, but aesthetically help to create more elegant and impressive environments.



Hybrid Black Natural



## Hybrid



**Hybrid White Natural**

NB16800 300x600x10.5mm

NB16806 600x600x10.5mm

NB16812 900x900x11mm

NB16818 600x1200x11mm



**Hybrid Beige Natural**

NB16801 300x600x10.5mm

NB16807 600x600x10.5mm

NB16813 900x900x11mm

NB16819 600x1200x11mm



**Hybrid Light Grey Natural**

NB16802 300x600x10.5mm

NB16808 600x600x10.5mm

NB16814 900x900x11mm

NB16820 600x1200x11mm



**Hybrid Tortora Natural**

NB16803 300x600x10.5mm

NB16809 600x600x10.5mm

NB16815 900x900x11mm

NB16821 600x1200x11mm

## Hybrid



Hybrid Black Natural

NB16804 300x600x10.5mm

NB16810 600x600x10.5mm

NB16816 900x900x11mm

NB16822 600x1200x11mm



## Hybrid

### Technical Specifications Physical properties

	Test of Norm	Value of Norm	N&C Value
Slip Resistance (Pendulum Test Values Rating)	BS7976 PTV36+(NR&AS) DIN51130 R10 NR&R11 AS		
Water Absorption	ISO10545-3	Hybrid, 0,03%	
Breaking Strength	ISO10545-4 between 3200N and 6400N		
Modulus of Rupture	ISO10545-4	>50mm/m2	
Resistance to Abrasion	ISO10545-6	Hybrid, 123mm3	
Length	ISO10545-2	Hybrid, +/- 0,2%	
Width	ISO10545-2	Hybrid, +/- 0,2%	
Thickness	ISO10545-2	Hybrid, +/- 2%	
Straightness of Sides	ISO10545-2	Hybrid, +/- 0,2%	
Squareness	ISO10545-2	Hybrid, +/- 0,3%	
Surface Flatness	ISO10545-2	Hybrid, +/- 0,2%	
Colour Resistance to Light Exposure			

### Chemical Properties

	Test of Norm	Value of Norm	N&C Value
Resistance to Acids (weak)			
Resistance to Acids (strong)	CSTB3778	Hybrid, 3 no alteration	
Resistance to House Hold Cleaning Products	CSTB3778	Hybrid, 3 no alteration	
Resistance to Staining	ISO10545-14	Hybrid, 4-5 Simple removal	