

N&C

Clifton




1 Colour / 1 Finish / 1 Size

08452 606 028 | www.ncspecifier.com | samples@ncspecifier.com

Clifton

A contemporary palette of muted tones transport these classics into modern day living.

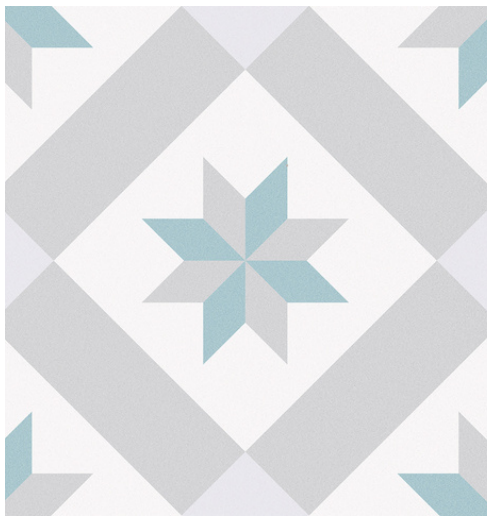

Clifton

NB16178
330x600x9mm



Clifton

Technical Specifications Physical properties

	Test of Norm	Test of Norm	N&C Value
Slip Resistance (Pendulum Test Values Rating)	BS – 7976 – 2:2002	32	
Water Absorption	UNE-EN-ISO 10545-3	0.7%	
Breaking Strength	UNE-EN-ISO 10545-4	1351 N	
Modulus of Rupture	UNE-EN-ISO 10545-4	40N/mm ²	
Resistance to Abrasion	UNE-EN-ISO 10545-7	4	
Length	UNE-EN-ISO 10545-2	250mm	
Width	UNE-EN-ISO 10545-2	250mm	
Thickness	UNE-EN-ISO 10545-2	8.4mm	
Straightness of Sides	UNE-EN-ISO 10545-2	0.8mm	
Squareness	UNE-EN-ISO 10545-2	0.8mm	
Surface Flatness	UNE-EN-ISO 10545-2	1mm	
Colour Resistance to Light Exposure	-----	-----	

Chemical Properties

	Test of Norm	Test of Norm	N&C Value
Resistance to Acids (weak)	UNE-EN-ISO 10545-13	GA	
Resistance to Acids (strong)	UNE-EN-ISO 10545-13	GLA	
Resistance to House Hold Cleaning Products	UNE-EN-ISO 10545-13	GHA	
Resistance to Staining	UNE-EN-ISO 10545-14	5	